
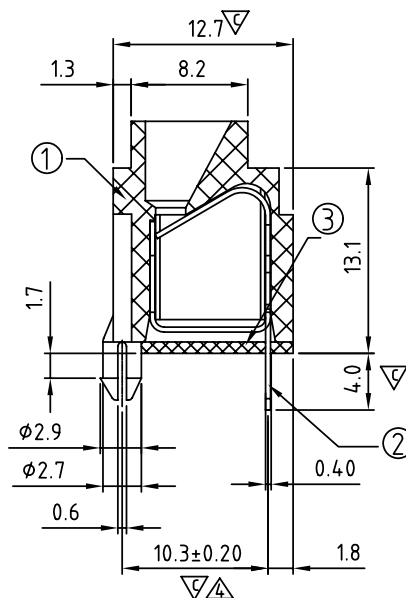
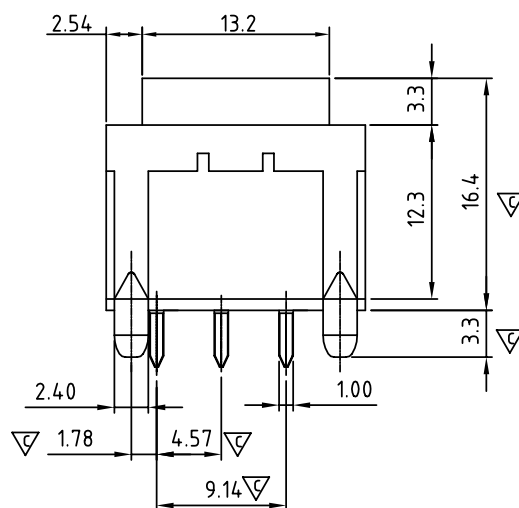


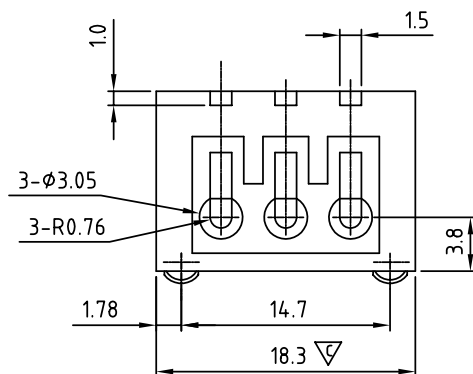

SIGN	DATE	DESCRIPTION	APPROVER
	02/27/07	Part No. is changed.	Aaron
	10/13/11	Operating temperature is changed	ChenMing
	10/13/11	Remove the "VDE" mark	ChenMing
	10/13/11	The dimension is changed from 10.29 to 10.3±0.20	ChenMing

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated
- Item 3 Insulating cover Thermoplastic (UL94V-0)

Electrica cULus

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6~7mm
- Withstanding Voltage: 1.6KV
- ▲ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- ▲ ● Safety Approval:  US
- Critical dimension: 

△ TN 03 1 x 9 0 xxxx G

RoHS compliant
(lead<4%)
In copper Alloy

0	Black	
9	White	0000 Standard @ Logo 000A Standard ANY Logo Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TN-4.57mm Series 3P With cover						
PART NO.	TN031X90XXXG			DWG NO.	8TN0101		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
			ChenMing 2011.10.13		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					SHEET: 01/01		X.XX ±0.10
					REV.: D		X° ±1°

SIGN	DATE	DESCRIPTION	APPROVER
△	02/27'07	Part No. is changed.	Aaron
△	10/13'11	Operating temperature is changed	ChenMing
△	10/13'11	Remove the "VDE" mark	ChenMing
△	10/13'11	The dimension is changed from 10.29 to10.3±0.20	ChenMing
△	10/13'11	The dimension is changed from 18.29 to18.3	ChenMing
△	10/13'11	The dimension is changed from 22.85 to22.85±0.25	ChenMing
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Contacts PIN PhBz(CuSn) Tin plated
- Item 3 Insulating cover Thermoplastic (UL94V-0)

Electrica cULus

- Voltage rating: 300VAC
- Current rating: 2A
- Solid wire(AWG): 18
- Stranded wire(AWG): 18
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- △ ● Safety Approval: 
- Critical dimension: 

△ TN 06 1 x 9 0 xxxx G

0 Black
9 White

RoHS compliant
(lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TN-4.57mm Series 6P With cover			
PART NO.	TN061X90XXXXG			DWG NO.	8TN0102
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
			ChenMing 2011.10.13		
				SHEET: 01/01	REV.: D
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
					X.XX ±0.10
					X° ±1°