

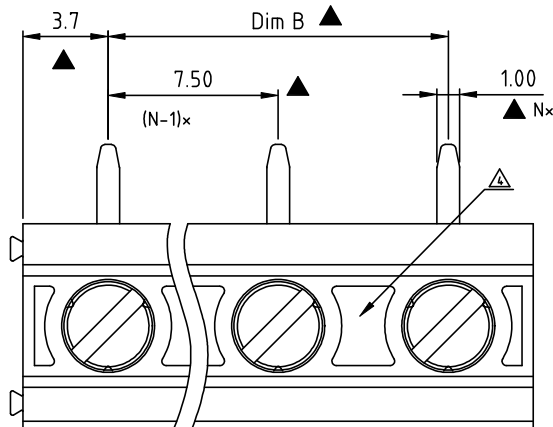
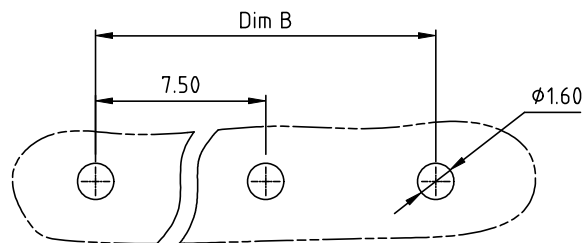


RoHS Compliant

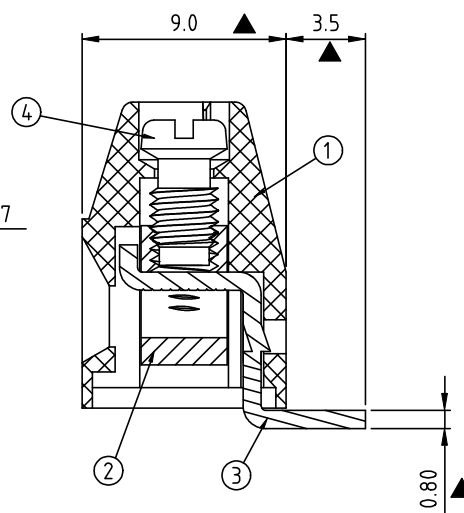

DIMENSION		Poles	Tolerance
Dim A	Nx7.5	2p-6p	±0.15
Dim B	(N-1)x7.5	7p-12p	±0.25
		13p-16p	±0.35

N=Number of poles

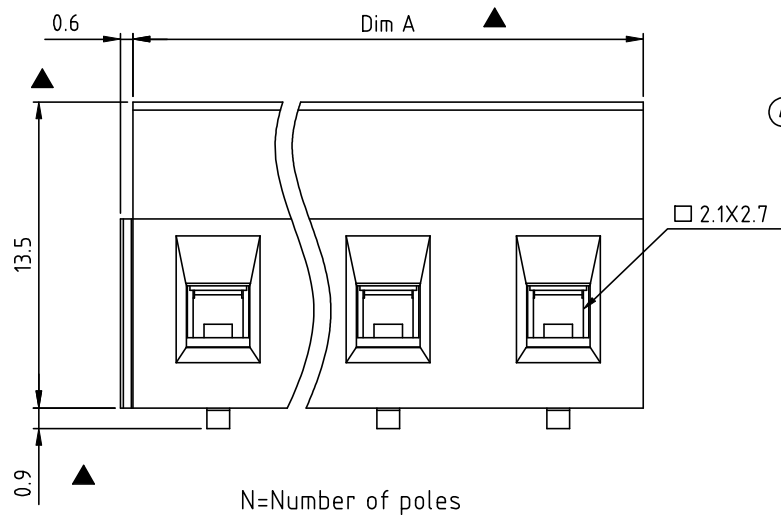

P.C.B LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	8/07'06	Added FIMKO standard	梁仁松
△	01/18'07	Soldering temperature changed from 245° to 250°	Tason
△	01/18'07	Part NO is Changed	Tason
△	12/28'09	The shape of digging hole is Changed	Aaron
△	04/27'18	Delete the FI mark, Update the drawing	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass ,Ni plated
- Item 3 Wire guard solder pin : Brass ,Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type

△ △ Electrical cULus

- Voltage rating: 300VAC
- Current rating: 16A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Torque: 3.5Lb-In.
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: 
- Critical dimension: ▲

△ △ VI xx 41 x 0 xxxx G

02 2 POLES
03 3 POLES
...
16 16 POLES

0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)
C Green(RAL6018/U)


0000:"@ "Logo (Standard)
000A:"ANYTEK" Logo
Any special item by
customer request,
please contact sales
department.

G RoHS compliant
(lead<4%)
In copper Alloy

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		VI 7.5 SERIES 90° wire inlet			
PART NO.	VIxx41x0xxxxG			DWG NO.	8VI0202
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Guoxue 2018.04.27	Guoxue 2018.04.27		
SHEET: 01/01				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				REV.: H	X.XX ±0.10
					X° ±1°