

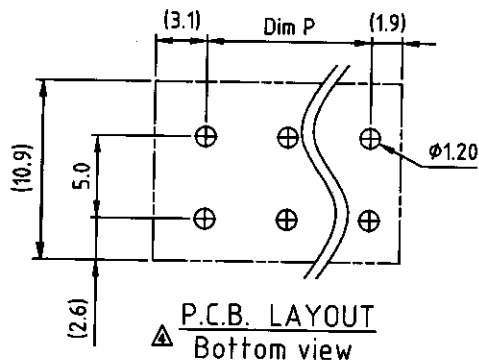
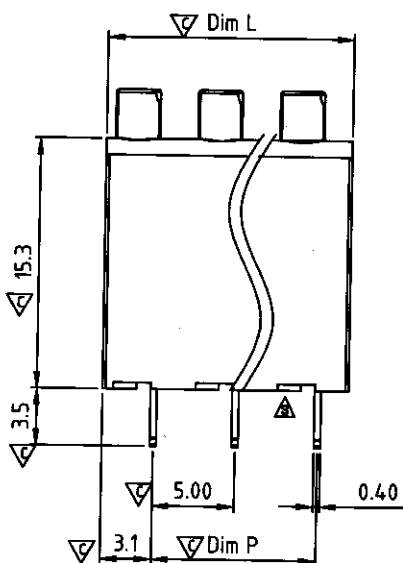




The color of lever is consistent with body's

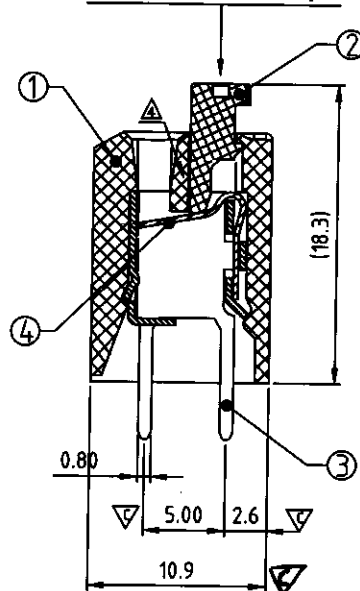

N=NUMBER OF POLES

Dim L	Nx5.0
Dim P	(N-1)x5.0

POLES	Dim L	Dim P
2p-6p	±0.15	±0.15
7p-12p	±0.2	±0.2
13p-18p	±0.25	±0.25
19p-24p	±0.3	±0.3

SIGN	DATE	DESCRIPTION	APPROVER
△	01/27/07	The Soldering temperature from 245° to 250°	Aaron
△	01/27/07	Add "VDE" stipulation	Aaron
△	8/6/07	The body bottom is changed.	Marvin
△	05/12/14	changed the structure of lever ///update the drawing	Da cheng


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Insulating lever Thermoplastic (UL94V-0)
- Item 3 Contact pin Brass, Tin plated
- Item 4 Spring clamp Stainless steel

Electrical cULus/VDE

- Voltage rating: 300VAC/450VAC
- Current rating: 10A/10A
- Wire range: 0.5-1.0mm²
- Solid wire(AWG): 16-20
- Stranded wire(AWG): 16-20
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.6KV/2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: CULUS VDE
- Critical dimension: △



HF xx 70 x 1 xxxx G

No. OF POLES
02: 2 POLES
03: 3 POLES
24: 24 POLES

Color
8 Grey (RAL 7004/P)
9 Orange

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

RoHS compliant (lead-free) in copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR, PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HF-5.0mm Series High profile type				DWG NO.		8HF0002	
PART NO.		HFxx70x1xxxxG				CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN					Tolerance	
		Da cheng 2014.05.12	Da cheng 2014.05.12			UNIT: mm		X.	±0.50
						SCALE: NONE		X.X	±0.30
								X.XX	±0.10
						SHEET: 01/01		X°	±1°
						REV: G			