
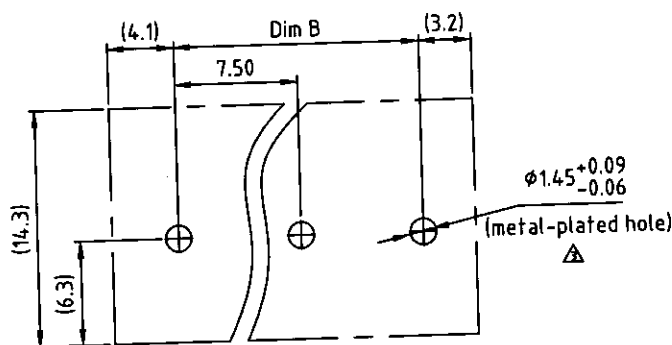
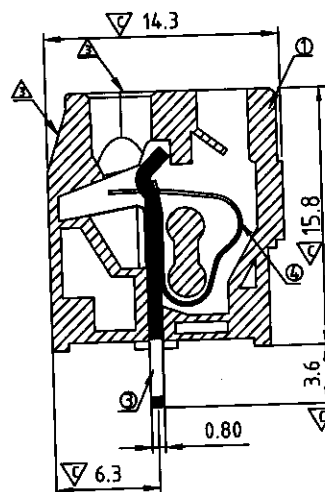
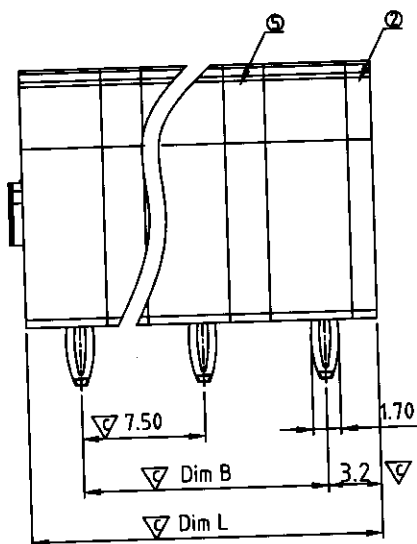



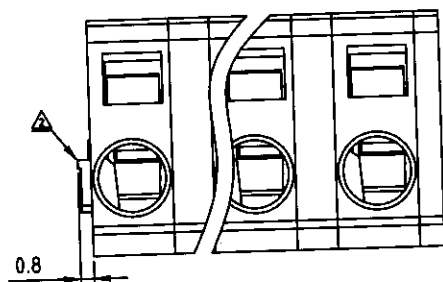

P.C.B LAYOUT
Top view

△ N=NUMBER OF POLES

Dim L	(N-1)×7.5+6.50
Dim B	(N-1)×7.5

POLES	Dim L	Dim B
1p	±0.15	
2p-4p	±0.2	±0.15
5p-8p	±0.3	±0.25
9p-12p	±0.4	±0.35
13p-16p	±0.45	±0.4

SIGN	DATE	DESCRIPTION	APPROVER
△	1/31'07	The soldering temperature from 245° to 250°	Aaron
△	05/28'13	change the structure	Da cheng
△	05/28'13	update the drawing	Da cheng
△	08/18'14	add the view	Ji long
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Insulator body: Thermoplastic (UL94V-0)
- Item ② Insulating cover: Thermoplastic (UL94V-0)
- Item ③ Contact pin: Brass. Tin plated
- Item ④ Wire guard: Stainless steel
- Item ⑤ Pad board: Thermoplastic (UL94V-0)

- Electrical:
- Voltage rating: 250V
 - Current rating: 8A
 - Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
 - Wire strip length: 8-9mm
 - Withstanding Voltage: 1.5KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: cULus
 - Critical dimension: ▽



HM xx 90 x 1 xxxx G

△ RoHs compliant (lead<4%) in copper Alloy

No. OF POLES
01: 1 POLES
02: 2 POLES
16: 16 POLES

△ COLOR
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HM7.5 mm Series Press fit Type					
PART NO.		HMxx90x1xxxxG		DWG NO.		8HM0004	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
				Ji long 2014.8.18		UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
						REV: G	X.XX ±0.10
						SHEET: 01/01	X° ±1°