

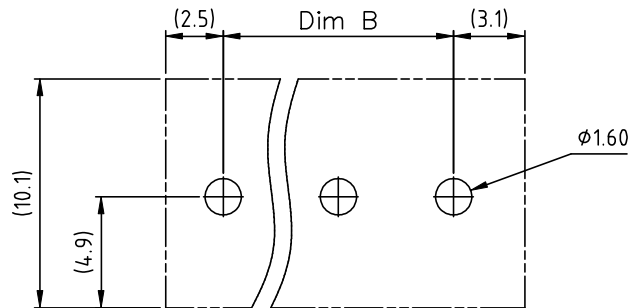
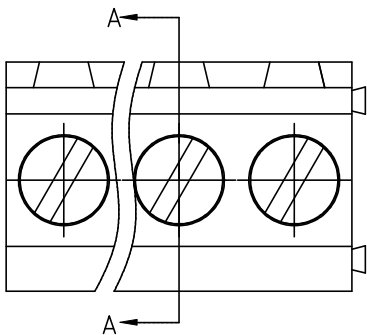


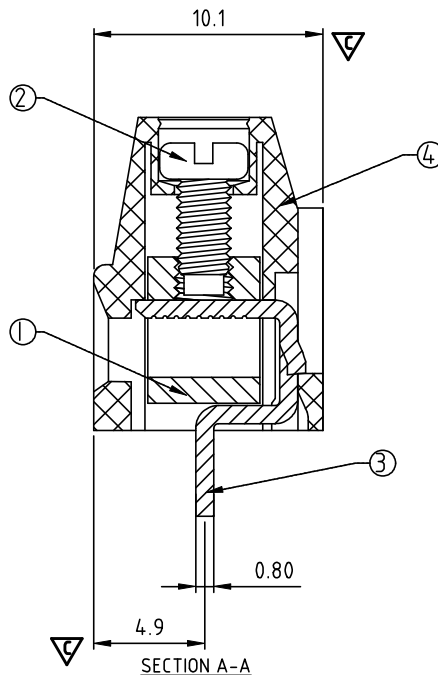

P.C.B LAYOUT
TOP VIEW

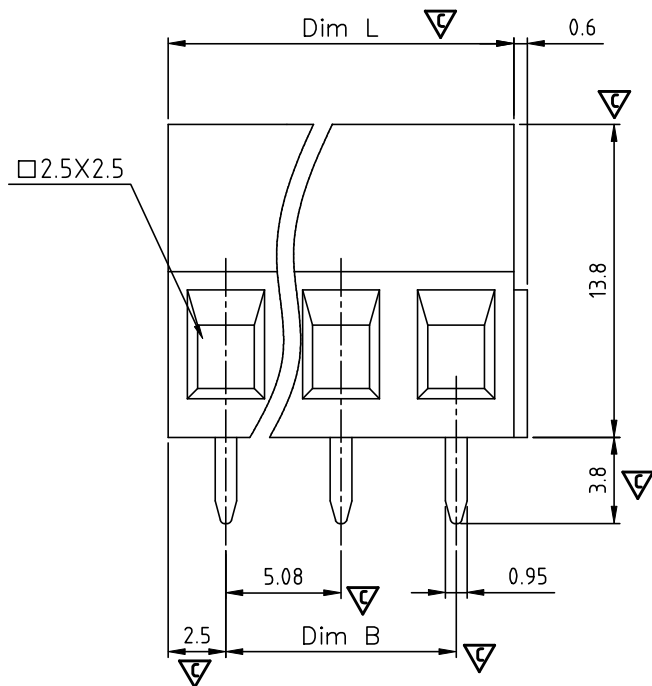

SIGN	DATE	DESCRIPTION	APPROVER
△	01/18 07	Soldering temperature changed from 245° to 250 °	Tason
△	01/18 07	Part No is changed	Tason
△	06/18 13	update the drawing	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item① Clamp: Brass, Ni plated
- Item② Terminal screw: Steel Zinc plating "--" slot type
- Item③ Wire guard solder pin: Brass, Tin plated
- Item④ Terminal housing: Thermoplastic (UL94V-0)

Electrical UL

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension:

YD xx 21 x 0 xxxx G			
02	2 POLES	0 Black(RAL9005)	0000:"@Logo (Standard) RoHS compliant
03	3 POLES	3 Orange(RAL2011/P)	000A:"ANYTEK"Logo (lead<4%)
...	...	5 Green(RAL6018/T)	0091 "ANYTEK"Logo In copper Alloy
24	24 POLES	6 Blue(RAL5015/A)	Any special item by customer request,
		8 Grey(RAL7035/D)	please contact sales department.
		C Green(RAL6018/U)	

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96	66.04
Dim B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80	55.88	60.96
TOL	±0.20						±0.25					
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	121.92	
Dim B	66.04	71.12	76.20	81.28	86.36	91.44	96.52	101.60	106.68	111.76	116.84	
TOL	±0.30						±0.40					

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		YD-5.08mm Series 2P-24P									
PART NO.		YDxx21x0xxxxG				DWG NO.		8YD0101			
APPROVED		CHECKED	DESIGNED	DRAWN		CUST NO.					
			Guoxue 2013.06.18	Guoxue 2013.06.18				UNIT: mm		X. ±0.50	
								SCALE: NONE		X.X ±0.30	
						SHEET: 01/01		REV.: F		X.XX ±0.10	
										X° ±1°	