
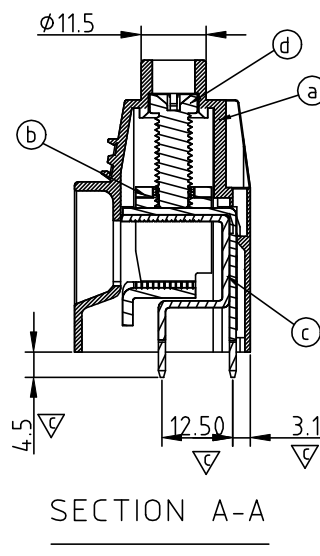
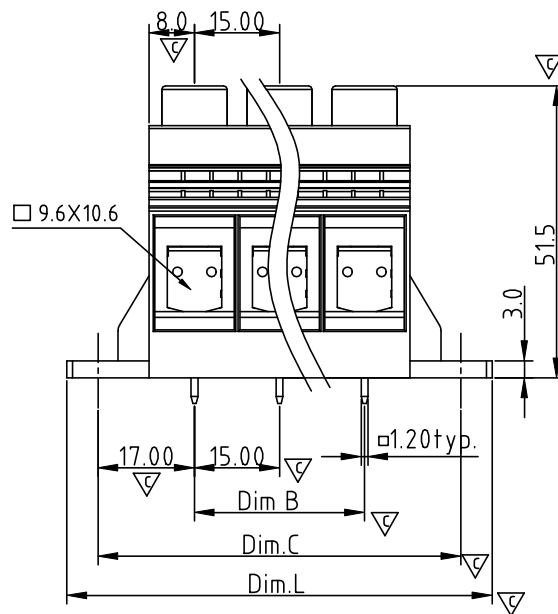
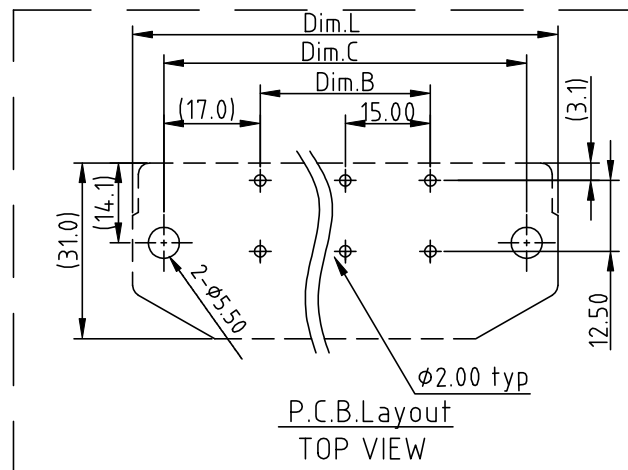


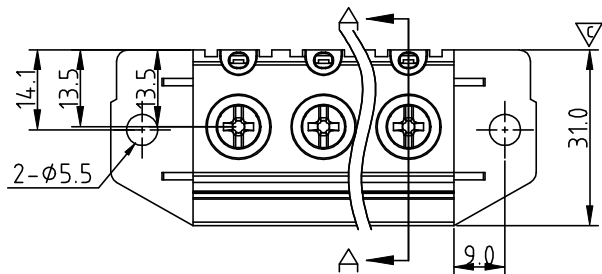

Dimension L&B&C

|       |                 |
|-------|-----------------|
| DIM B | (N-1)×15.0      |
| DIM C | (N-1)×15.0+34.0 |
| DIM L | (N-1)×15.0+45.0 |

N=Number of poles

| Poles  | L&B Tolerance |
|--------|---------------|
| 1P-2P  | ±0.30         |
| 2P-4P  | ±0.50         |
| 5P-10P | ±0.80         |

| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
| △    |      |             |          |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item① Terminal housing :Thermoplastic (UL 94V-0)
- Item② Clamp : Steel Stamping , Zinc plated
- Item③ Wire guard solder pin : Copper , Tin plated
- Item④ Terminal screw: Steel Zinc plating"+/-"slot type
- Electrical Use group B&C Use group D
- Voltage rating: 600V 600V
- Current rating: 127A 5A
- Wire range: 1-20
- Torque: Lb-In (N.m): 34-36.5 (3.8-4.1)
- Screw: M6
- Wire strip length: 19-20mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40° C to +115° C
- Soldering temperature: 260° C±5° C/5 Sec
- Safety Approval: CE, RoHS
- Critical dimension: ∇

K9 xx C3 x 21 xxx G

POLES  
01 01 POLES  
02 02 POLES  
03 03 POLES  
10 10 POLES

0 Black  
2.Red  
3.Orange  
4.Yellow  
5 Green (RAL6018/T)  
6 Blue (RAL5015/A)  
8 Grey (RAL7004/P)  
9 White  
C: Green(RAL 6018/U)

000:"@ "Logo (Standard )  
00A:"ANYTEK" Logo  
Any special item by  
customer request,  
please contact sales  
department.

G RoHS compliant  
(lead<4%)  
In copper Alloy

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |                                                               |                      |                      |                                                                                       |             |  |            |           |
|----------|---------------------------------------------------------------|----------------------|----------------------|---------------------------------------------------------------------------------------|-------------|--|------------|-----------|
| TITLE    | K9 15.0 Series With flange ( Single-handed )" + "/" slot type |                      |                      |                                                                                       |             |  |            |           |
| PART NO. | K9xxC3x21xxxG                                                 |                      |                      | DWG NO.                                                                               | 8K90008     |  |            |           |
| APPROVED | CHECKED                                                       | DESIGNED             | DRAWN                | CUST NO.                                                                              |             |  |            | Tolerance |
|          |                                                               | Guoxue<br>2014.03.10 | Guoxue<br>2014.03.10 |  |             |  |            | UNIT: mm  |
|          |                                                               |                      |                      |                                                                                       | SCALE: NONE |  | X.X ±0.30  |           |
|          |                                                               |                      |                      | SHEET: 01/01                                                                          | REV.: B     |  | X.XX ±0.10 |           |
|          |                                                               |                      |                      |                                                                                       |             |  | X* ±1*     |           |