
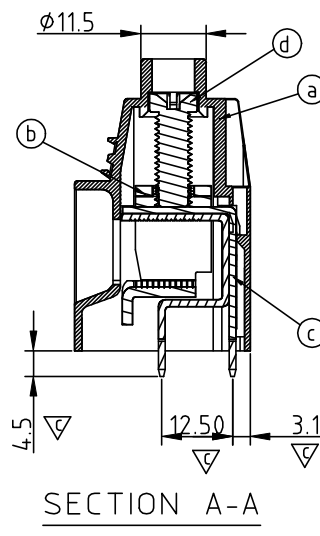
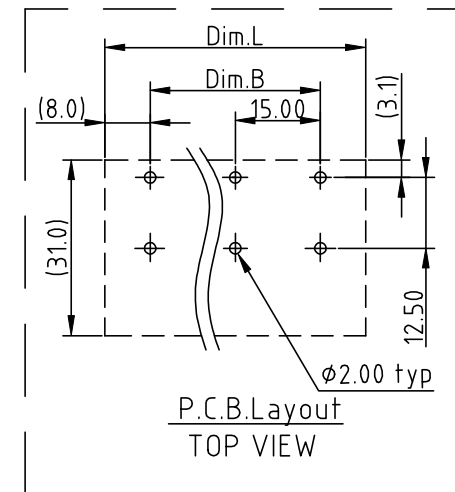


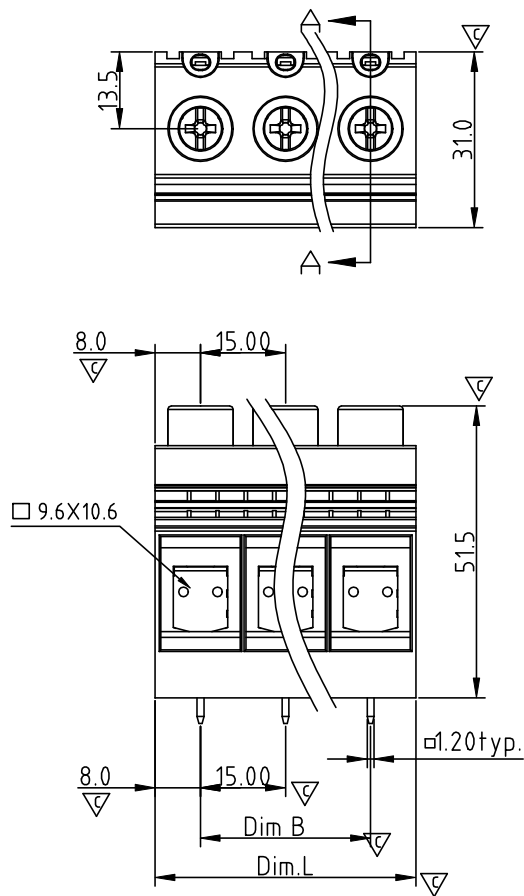

Dimension L&B

DIM B	(N-1)×15.0
DIM L	(N-1)×15.0+16

N=Number of poles

Poles	L&B Tolerance
1P-2P	±0.30
3P-4P	±0.50
5P-10P	±0.80

SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material:

- Item① Terminal housing :Thermoplastic (UL 94V-0)
- Item② Clamp : Steel Stamping , Zinc plated
- Item③ Wire guard solder pin : Copper , Tin plated
- Item④ Terminal screw: Steel Zinc plating"+/-"slot type
- Electrical Use group B&C Use group D
- Voltage rating: 600V 600V
- Current rating: 127A 5A
- Wire range: 1-20
- Torque: Lb-In (N.m): 34-36.5 (3.8-4.1)
- Screw: M6
- Wire strip length: 19-20mm
- Withstanding Voltage: 2.2KV
- Operating temperature: -40° C to +115° C
- Soldering temperature: 260° C±5° C/5 Sec
- Safety Approval: CE, RoHS
- Critical dimension: △

K9 xx C 3 x 2 0 xxx G

- 01 1 POLES
- 02 2 POLES
- 03 3 POLES
-
- 10 10 POLES

- 0 Black
- 2 Red
- 3 Orange
- 4 Yellow
- 5 Green (RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey (RAL7004/P)
- 9 White
- C: Green(RAL 6018/U)

- 000:"@ "Logo (Standard)
- 00A:"ANYTEK"Logo
- Any special item by customer request, please contact sales department.

- G RoHS compliant (lead<4%) In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	K9 15.0 Series without flange (Single-handed)"+"-"/"slot type								
PART NO.	K9xxC3x20xxxG			DWG NO.	8K90007				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.				Tolerance	
		Guoxue 2014.03.10	Guoxue 2014.03.10					UNIT: mm	X.
					SCALE: NONE	X.X	±0.30		
					REV: B	X.XX	±0.10		
					SHEET: 01/01	X*	±1*		