

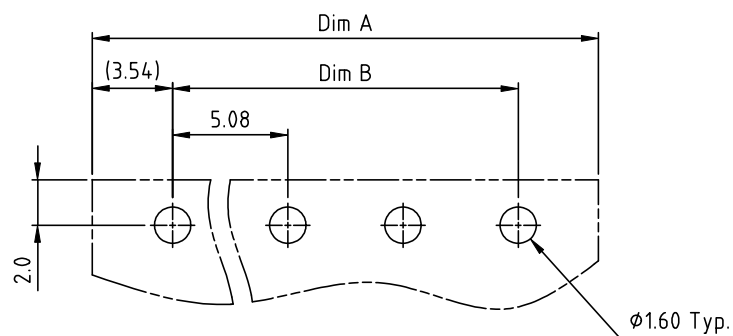
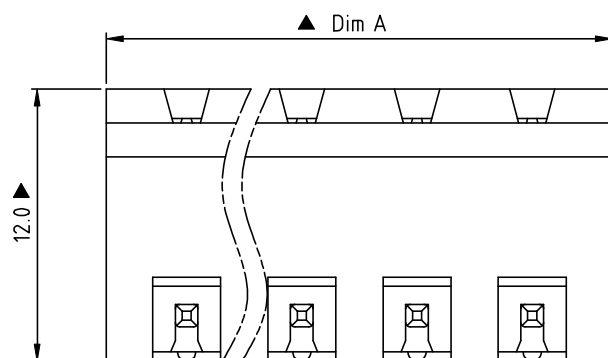


RoHS Compliant

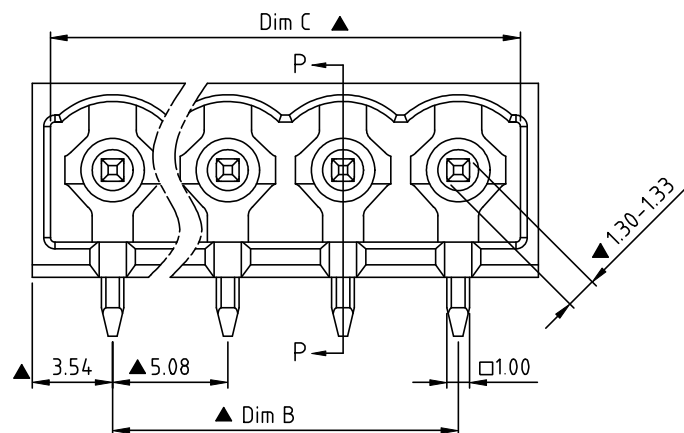

RECOMMENDED P.C.B LAYOUT

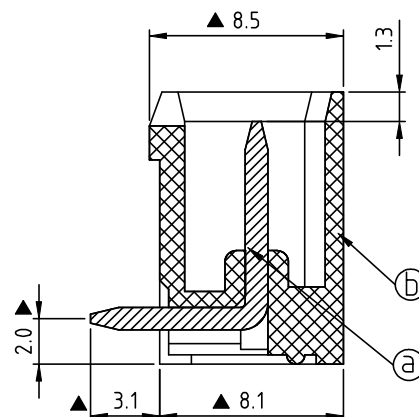

SECTION P-P

DIMENSION

Dim A	$(N-1) \times 5.08 + 7.08$
Dim B	$(N-1) \times 5.08$
Dim C	$(N-1) \times 5.08 + 5.48$

N = Number of poles

Poles	Tolerance (Dim.A&B&C)
2p-6p	±0.15
7p-12p	±0.25
13p-16p	±0.35
17p-24p	±0.40

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		10/23-18	Initial release	zhangcan

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Contact pin: Copper Bright Tin plated over Nickel plated
- Item ② Insulator(housing): Thermoplastic (UL 94V-0)

Electrical:

- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▲

OQ xx 5 4 x A xxxx G

No. OF POLES
02: 2 POLES
.....
24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy

0000 "®" Logo
000A "ANY" Logo
... ..

Any special item by
customer request,
please contact sales
department

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 5.08mm 90° Close Series 2p-24p 反向折弯					
PART NO.		OQxx54xAxxxxG		DWG NO.		80Q07461	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		zhangcan 10/23-18	zhangcan 10/23-18		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV.: B		X.XX ±0.10
					SHEET: 01/01		X° ±1°