
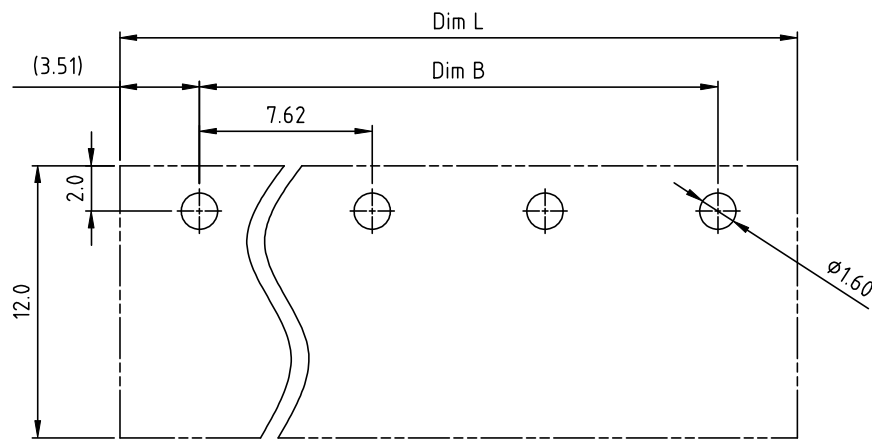
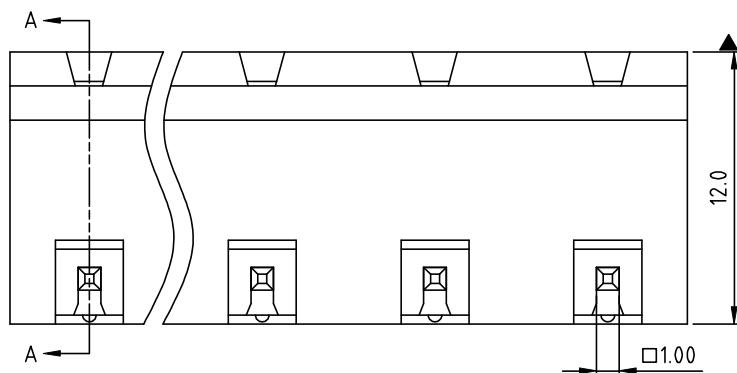


RoHS Compliant

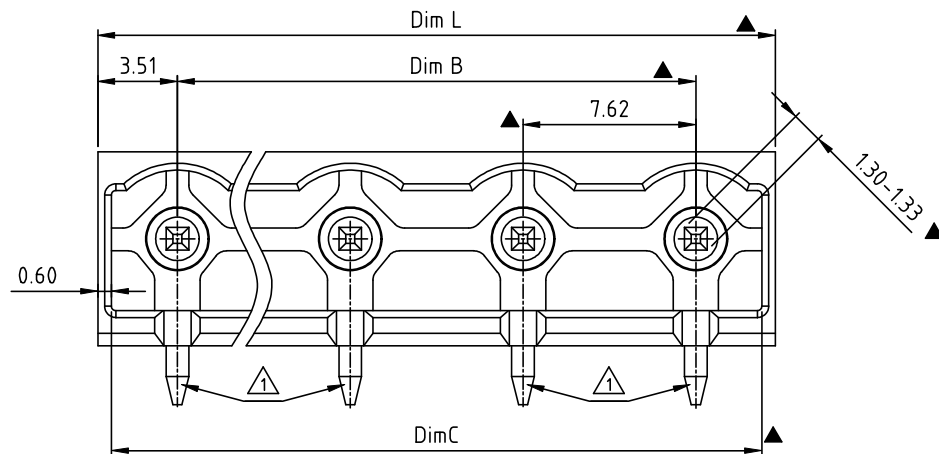


RECOMMENDED P.C.B LAYOUT
TOP VIEW

DIMENSION

DimL	Nx7.62-0.60
DimB	(N-1)x7.62
DimC	(N-1)x7.62+5.82

N= Number of poles

Poles	Tolerance
2P-6P	±0.20
7P-12P	±0.30
13P-16P	±0.40

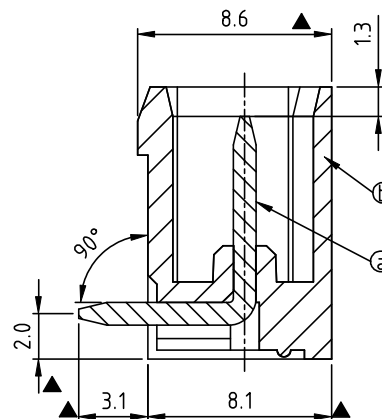

Section A-A

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		06/25-18	Initial release	Chen Bo
C	△	02/04-21	update the view	Chen Bo
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item ③ Male contact pin: Copper, Bright Tin plated over Nickel plated
- Item ④ Terminal(housing): Thermoplastic (UL94V-0)

Electrical:

cULus

- Voltage rating: 300V
- Current rating: 20A
- Withstanding Voltage: 1.6 KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ▲

OQ xx 0 1 x A xxx G

No. OF POLES
02: 2 POLES
:
16: 16 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White
- C Green(RAL6018/U)


G RoHS compliant
(lead<4%)
In copper Alloy

0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OQ 7.62 mm Series (Reverse bending)			
PART NO.	OQxx01xAxxxxG			DWG NO.	80Q03105
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 02/04-21	Chen Bo 06/19-18		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
SHEET: 01/01		REV.: C			