SIGN	DATE	DESCRIPTION	APPROVER
⚠	10/09'09	Add is cULus Mark	Aaron
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

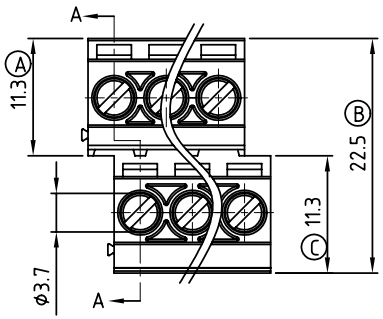

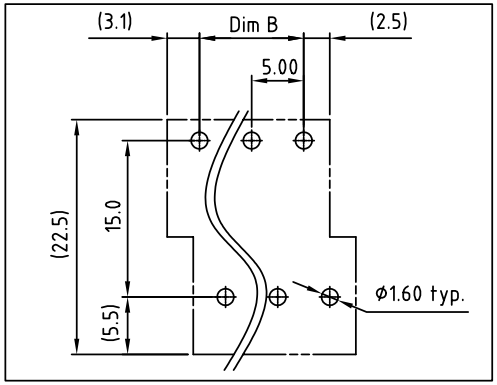

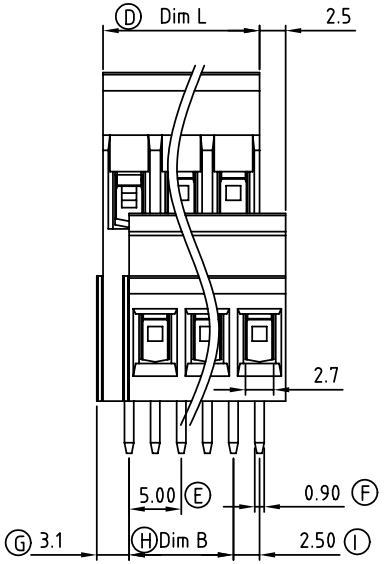

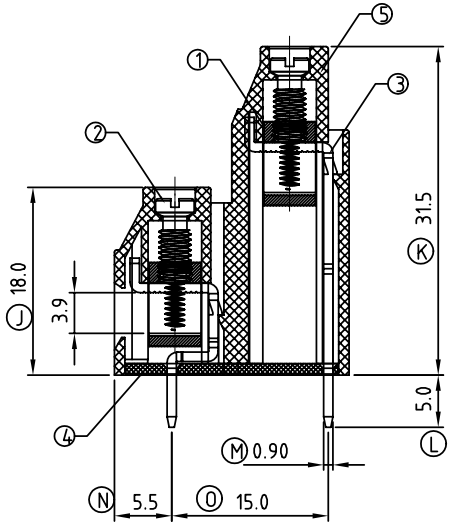

SECTION A-A

Material

- Item① Clamp: Brass, Ni plated
- Item② Terminal screw: Steel Zinc plating "-" slot type
- Item③ Wire guard solder pin: Brass,Tin plated
- Item④ Terminal cover : Thermoplastic (UL94V-0)
- Item⑤ Terminal housing : Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 20A
- Wire range:
- Solid wire(AWG): 12-22
- Stranded wire(AWG): 12-22
- Torque(Lb-In): 4.3
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- ⚠ Safety Approval: c UL us

EB xx 0 1 x 0 xxxx G

04	2×2 CONTACTS	0	Black	0000:"@"Logo (Standard)	RoHS
06	2×3 CONTACTS	5	Green	000A:"ANYTEK"Logo	Pb<40,000ppm
...	...	6	Blue	Any special item by customer request, please contact sales department.	
48	2×24 CONTACTS	8	Grey		

Poles	2×2	2×3	2×4	2×5	2×6	2×7	2×8	2×9	2×10	2×11	2×12	2×13
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
TOL	±0.15					±0.20						±0.25

Poles	2×14	2×15	2×16	2×17	2×18	2×19	2×20	2×21	2×22	2×23	2×24	
Dim L	70.00	75.00	80.00	85.00	90.00	95.00	100.0	105.0	110.0	115.0	120.0	
Dim B	65.00	70.00	75.00	80.00	85.00	90.00	95.00	100.0	105.0	110.0	115.0	
TOL	±0.25					±0.30						

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	EB 5.0mm Series With cover type (Interlace)				
PART NO.	EBxx01x0xxxxG			DWG NO.	8EB0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Aaron 2009.10.09	Aaron 2009.10.09	UNIT: mm / SCALE: NONE / SHEET: 01/01 / REV.: C	

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°