
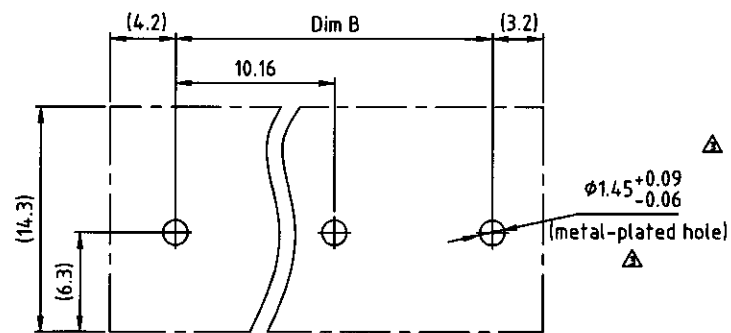
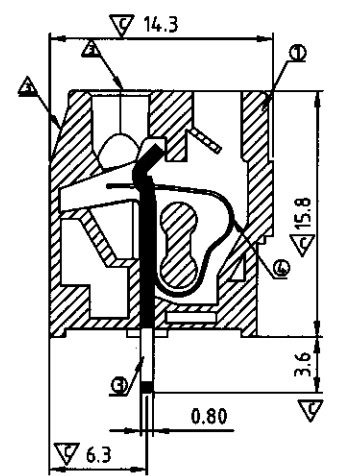
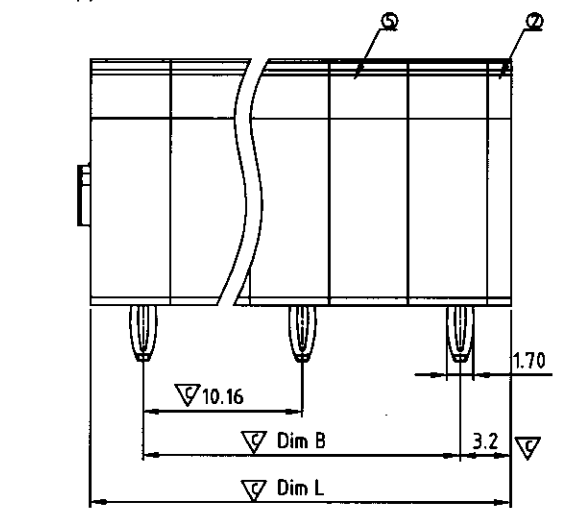
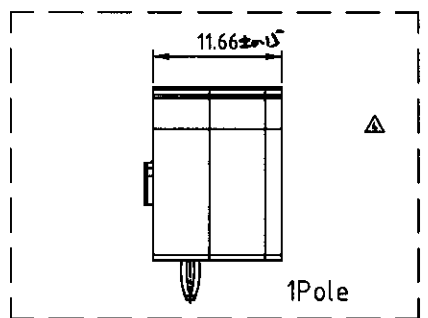


1 2 3 4 5 6 7

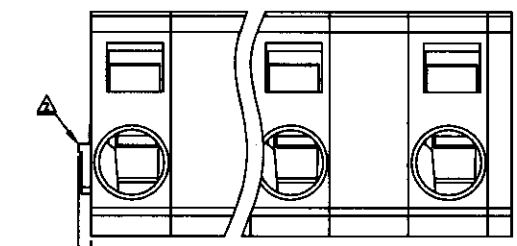

P.C.B LAYOUT
Top view

△ N=NUMBER OF POLES

Dim L	(N-1)×10.16+6.58
Dim B	(N-1)×10.16

POLES	Dim L	Dim B
1p	±0.15	
2p-4p	±0.2	±0.15
5p-7p	±0.3	±0.25
8p-10p	±0.4	±0.35
11p-12p	±0.45	±0.4

SIGN	DATE	DESCRIPTION	APPROVER
△	1/31'07	The soldering temperature from 245° to 250°	Aaron
△	05/28'13	change the structure	Da cheng
△	05/28'13	update the drawing	Da cheng
△	08/18'14	add the view	Ji long

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item ① Insulator body: Thermoplastic (UL94V-0)
- Item ② Insulating cover: Thermoplastic (UL94V-0)
- Item ③ Contact pin: Brass. Tin plated
- Item ④ Wire guard: Stainless steel
- Item ⑤ Pad board: Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 250V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 1.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus
- Critical dimension: ▽



HM xx 60 x 1 xxxx G

- No. OF POLES
- 01: 1 POLES
 - 02: 2 POLES
 - 12: 12 POLES

- △ COLOR
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7004/P)
 - 9 White(RAL1102)
 - C Multiple colors

- 0000 Standard @ Logo
- 000A Standard ANY Logo
- Any special item by customer request, please contact sales department.

△ RoHs compliant
(lead<4%)
In copper Alloy

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HM10.16mm Series press fit type				
PART NO.	HMxx60x1xxxxG			DWG NO.	8HM0106	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
			Ji long 2014.8.18		UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
					SHEET: 01/01	REV: E

1 2 3 4 5 6 7