


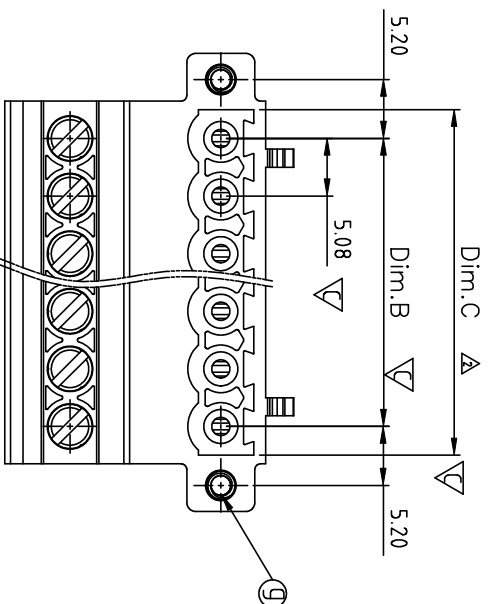

3P-24P卡勾位置示意图

V9 xx 5 1 x 3 xxxx G

No. OF POLES
02: 2 POLES
03: 3 POLES

24: 24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL 1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL 1102)
- C Green(RAL6018/U)

RoHS compliant
(lead<4%)
In copper Alloy

Material:

- Item ① Clamp: Brass Ni plated
- Item ② Terminal (housing): Thermoplastic (UL94V-0)
- Item ③ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ④ Male contact: Phbz, Bright Tin plated over Nickel plated
- Item ⑤ Terminal screw: Steel Zinc plating " - " slot type
- Item ⑥ Terminal(track): Thermoplastic (UL94V-0)
- Item ⑦ With flange nut: Brass M2.5

Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG):12-30
- Stranded wire(AWG):12-30
- Torque:5.2Lb-In.
- Screw:M3

- Wire strip length: 6-7 mm
- Withstanding Voltage: 16KV
- Operating temperature:-40°C to +115°C

- ▲ Safety Approval: 
- Safety Approval: 
- Critical dimension: 

N=Number of poles

Dimension

Dim.A	(N-1) × 5.08+6.6
Dim.B	(N-1) × 5.08
Dim.C	N × 5.08

Poles	Tolerance
2P - 6P	±0.15
7P - 12P	±0.20
13P - 18P	±0.30
19P - 24P	±0.40

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE V9-5.08 mm Series 2P-24P With Flange (Dinrail holder A type)

PART NO. V9xx51x3xxxxG DWG NO. 8V90003

APPROVED CHECKED DESIGNED DRAWN CUST. NO.

Evan Tony 02/15-16 2008.01.19

UNIT:	Tolerance
mm	±0.50
SCALE: NONE	±0.30
REV.: D	±0.10
SHEET: 01/01	±1°