

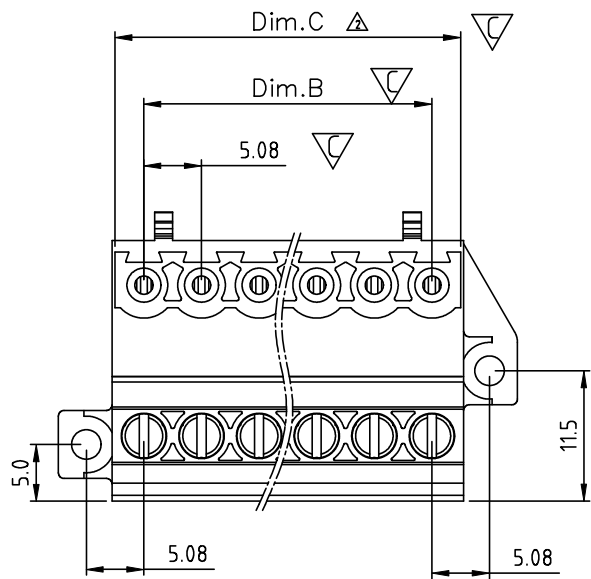


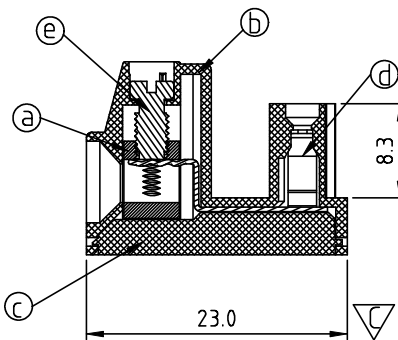

3P-24P卡勾位置示意图

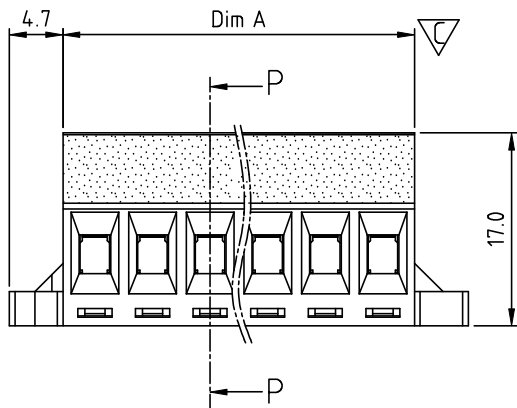


SECTION P-P

V9 xx 5 1 x 0 xxxx G

No. OF POLES  
02: 2 POLES  
03: 3 POLES  
...  
24: 24 POLES

COLOR  
0 Black (RAL9005)  
2 Red (RAL3001/D)  
3 Orange(RAL2011/P)  
4 Yellow(RAL1018/A)  
5 Green(RAL6018/T)  
6 Blue (RAL5015/A)  
8 Grey(RAL7035/D)  
9 White(RAL1102)  
C Green(RAL6018/U)

G RoHS compliant  
(lead<4%)  
In copper Alloy  
0000: "@" Logo (Standard)  
000A: "ANYTEK" Mark  
Any special item by  
customer request.



2P 示意图

| SIGN | DATE     | DESCRIPTION                          | APPROVER |
|------|----------|--------------------------------------|----------|
| △    | 11/09'11 | Add is cULus                         | Aaron    |
| △    | 11/09'11 | The Dim C is added                   | Aaron    |
| △    | 01/21-16 | Update the drawing & Add the 2P view | Evan     |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

△ Material:

- Item ① Clamp: Brass Ni plated
- Item ② Terminal (housing): Thermoplastic (UL94V-0)
- Item ③ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ④ Male contact: PhBz, Bright Tin plated over Nickel plated
- Item ⑤ Terminal screw: Steel Zinc plating " - " slot type

Electrical: cULus

- Voltage rating: 300V
- Current rating: 12A
- Wire range:
- Solid wire(AWG):12-30
- Stranded wire(AWG):12-30
- Torque: 5.2 Lb-In.
- Screw: M3
- Wire strip length:6-7 mm
- Withstanding Voltage:1.6KV
- Operating temperature:-40°C to +115°C

- △ Safety Approval: cULus
- Critical dimension: ▽

N=Number of poles

Dimension

|       |                           |
|-------|---------------------------|
| Dim.A | $(N-1) \times 5.08 + 5.6$ |
| Dim.B | $(N-1) \times 5.08$       |
| Dim.C | $N \times 5.08$           |

| Poles     | Tolerance |
|-----------|-----------|
| 2P - 6P   | ±0.15     |
| 7P - 12P  | ±0.20     |
| 13P - 18P | ±0.30     |
| 19P - 24P | ±0.40     |

**ANYTEK**

**CUSTOMER COPY**

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

|          |  |                                                                  |                  |                     |                                                                                       |             |           |      |       |     |
|----------|--|------------------------------------------------------------------|------------------|---------------------|---------------------------------------------------------------------------------------|-------------|-----------|------|-------|-----|
| TITLE    |  | V9 -5.08 mm Series 2P-24P W/O Flange ( Bottom cover fixed type ) |                  |                     |                                                                                       |             |           |      |       |     |
| PART NO. |  | V9xx51x0xxxxG                                                    |                  |                     | DWG NO.                                                                               |             | 8V90006   |      |       |     |
| APPROVED |  | CHECKED                                                          | DESIGNED         | DRAWN               | CUST NO.                                                                              |             | Tolerance |      |       |     |
|          |  |                                                                  | Evan<br>02/15-16 | Jacke<br>2009.10.30 |  | UNIT: mm    |           | X.   | ±0.50 |     |
|          |  |                                                                  |                  |                     |                                                                                       | SCALE: NONE |           | X.X  | ±0.30 |     |
|          |  |                                                                  |                  |                     |                                                                                       | REV.: D     |           | X.XX | ±0.10 |     |
|          |  |                                                                  |                  |                     | SHEET: 01/01                                                                          |             | REV.: D   |      | X°    | ±1° |