





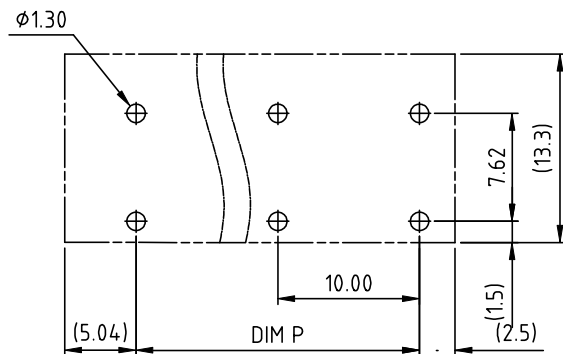
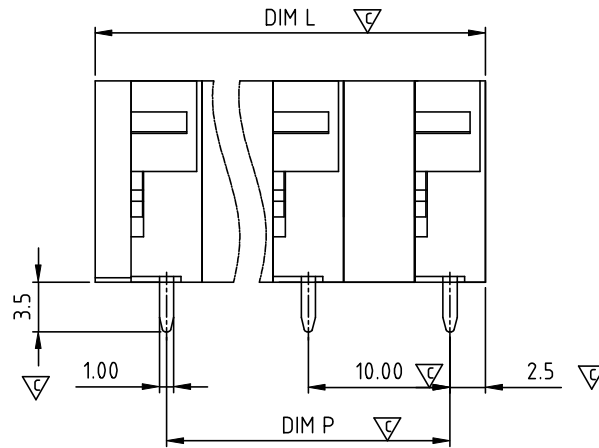
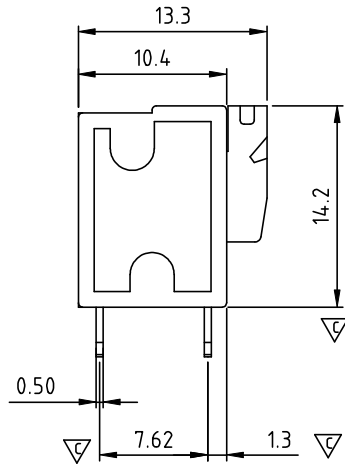
SIGN	DATE	DESCRIPTION	APPROVER
△	4.26	Material change.	Richard
△	11.17'05	Electrical is changed.	Marvin
△	10/11'06	Added VDE standard	Steady
△	01/20.07	The soldering emperature from245° to 250°	Aaron
△	2010.08.12	The design is changed	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

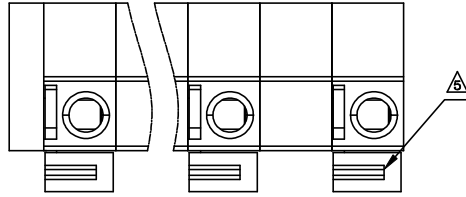

- △ Material
- Terminal body (Contact pin): Brass
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0)

- △△ Electrical cULus/VDE
- Voltage rating: 300VAC/450VAC
 - Current rating: 10A/10A
 - Wire range: 0.75-1.5mm²
 - Solid wire(AWG): 14-24
 - Stranded wire(AWG): 14-24
 - Pull force:
 - Screw:
 - Wire strip length: 9-10mm
 - Withstanding Voltage: 1.6KV/2.5KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:  
 - Critical dimension: 



P.C.B. LAYOUT

N = Number of poles
 Dim L=(N-1)x10.0+7.54
 Dim P=(N-1)x10.0

	Dim P
2-6p	±0.10
7-12p	±0.20
13-18p	±0.25
19-24p	±0.30

HA xx 40 x 0 xxxx G

- 02 2 CONTACTS 2 Red 0000: "@" Logo (Standard)
 - 03 3 CONTACTS 3 Orange 000A: "ANYTEK" Mark
 - 5 Green(RAL6018/T) Any special item by customer request.
 - 12 12 CONTACTS 8 Grey(RAL7004/P) please contact sales department.
- G: Pb<40,000ppm

ANYTEK				CUSTOMER COPY			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		HA-10.0mm 90° Series					
PART NO.		HAxx40x0xxxxG			DWG NO.		8HA0401
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Runner	Chen Bo			X. ±0.50
			2012.03.27	2010.08.12			X.X ±0.30
							X.XX ±0.10
							X° ±1°
					SHEET: 01/01		REV.: G