




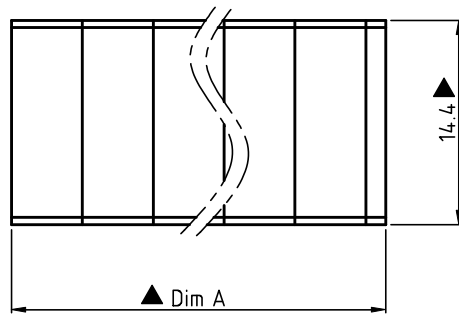


DIMENSION

Dim A	NX5.00+1.40
Dim B	(N-1)X5.00

N=Number of contacts

Poles	Tolerance
1p-6p	±0.10
7p-12p	±0.20
13p-18p	±0.30
19p-24p	±0.40

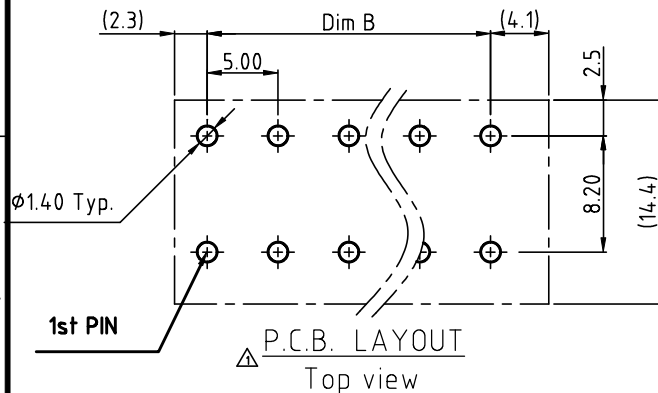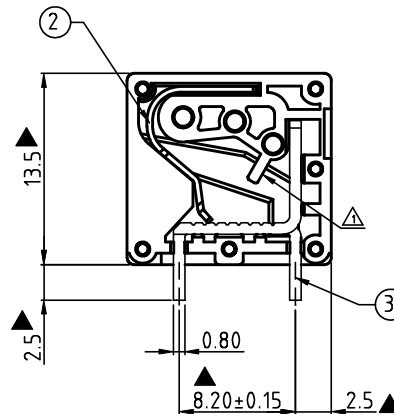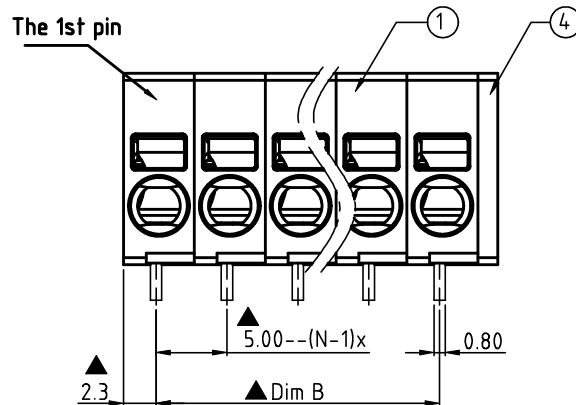

SIGN	SIGN	DATE	DESCRIPTION	APPROVER
C	△	04/05'13	change the structure & update the drawing	Da cheng
D	△	10/17'13	Add is cULus	Da cheng
E	△	02/27'17	Add "TUV" Mark	Eddie
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

Material:

- Item 1 Terminal housing : Thermoplastic (UL 94V-0)
- Item 2 Spring clamp: Stainless steel
- Item 3 Solder pin : Brass ,Tin plated
- Item 4 Terminal cover : Thermoplastic (UL 94V-0)

- △ △ Electrical: cULus TUV
- Voltage rating: 300 V 300 V
 - Current rating: 32A
 - Current rating(Sol): 13A
 - Current rating(Str): 16 A
 - Wire range: 0.2-4mm²
 - Solid wire(AWG): 14-24
 - Stranded wire(AWG): 12-24
 - Wire strip length: 9-10mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - △ ● Soldering temperature: 260°C±5°C/5 Sec
 - △ ● Safety Approval: cULus TUV △
 - Critical dimension: △

NJ xx 01 x 0 xxxx G

- No. of poles
- 01 1 CONTACTS
 - 02 2 CONTACTS
 - 03 3 CONTACTS
 -
 - 24 24 CONTACTS

- △ Color
- 0 Black (RAL9005)
 - 2 Red (RAL3001/D)
 - 3 Orange(RAL2011/P)
 - 4 Yellow(RAL1018/A)
 - 5 Green(RAL6018/T)
 - 6 Blue (RAL5015/A)
 - 8 Grey(RAL7004/P)
 - 9 White(RAL1102)
 - C Multiple colors

- △ RoHs compliant (lead<4%) In copper Alloy
- 0000:"@ "Logo (Standard)
- 000A:"ANYTEK"Logo
- Any special item by customer request, please contact sales department.

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	NJ- 5.0 Series 1P-24P Horizontal (180D wire inlet)						
PART NO.	NJxx01x0xxxxG			DWG NO.	8NJ0101		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Dacheng 2013.10.21	Dacheng 2013.10.21		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
							X.XX ±0.10
							X° ±1°
				SHEET: 01/01		REV.: E	