
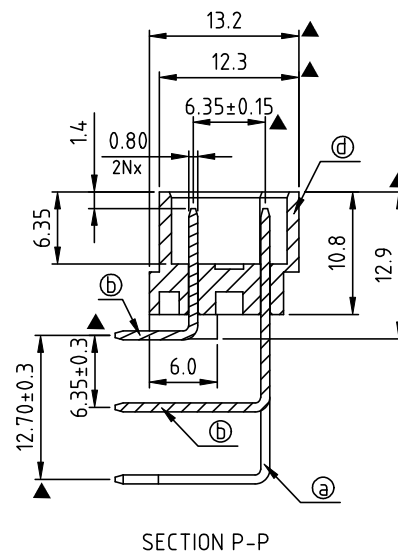
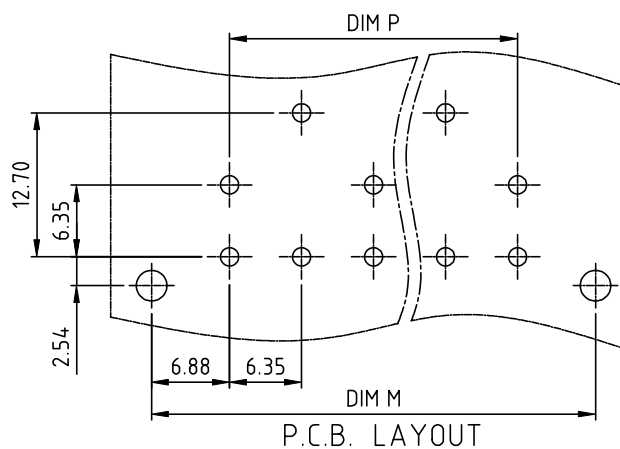
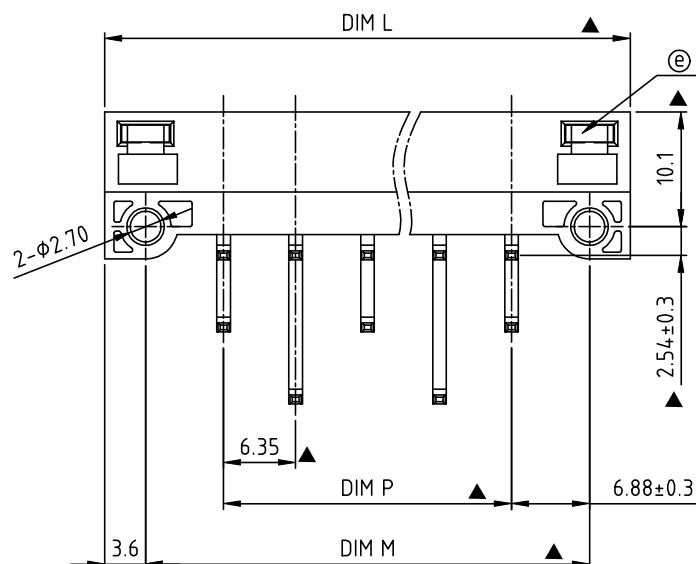


RoHS Compliant

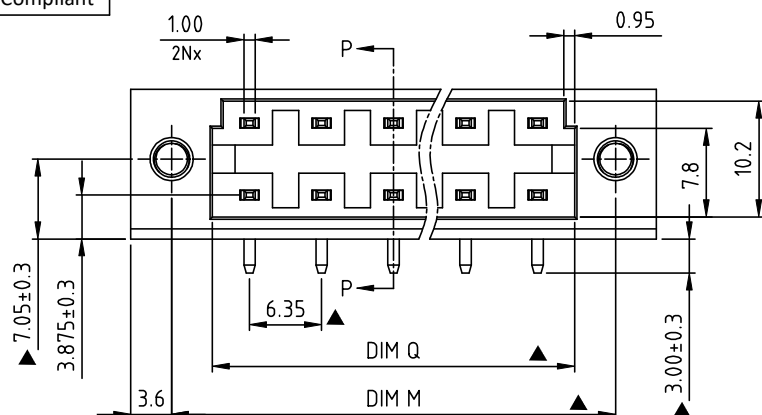

N = Number of poles

Dim L	(N/2-1)×6.35+20.95
Dim M	(N/2-1)×6.35+13.75
Dim P	(N/2-1)×6.35
Dim Q	(N/2-1)×6.35+6.55

Poles	Tolerance
2×3P-2×5P	±0.30
2×6P-2×10P	±0.40
2×11P-2×16P	±0.50
2×17P-2×24P	±0.60

Rev	SIGN	DATE	DESCRIPTION	APPROVER
B		05/23-18	Initial release	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item ① Long solder pin: Brass, Matted Tin plated over Nickel plated
- Item ② middle solder pin: Brass, Matted Tin plated over Nickel plated
- Item ③ Short solder pin: Brass, Matted Tin plated over Nickel plated
- Item ④ Terminal(housing): Thermoplastic (UL94V-0)
- Item ⑤ Flange Nut: Steel Zinc plating M3.0

Electrical:

- Voltage rating: 300V
 - Current rating: 6A
 - Withstanding Voltage: 2.5 KV
 - Rate Impulse Voltage: 5Kv
 - Operating temperature: -40°C to +75°C
 - Soldering temperature: 260°C±5°C/5 Sec
 - Contact resistance: ≤5mΩ
 - Insulation Resistance: 1000MΩ or more at DC500V
 - Safety Approval:
 - Critical dimension: ▲
- Material Group: IIIa
 - Pollution Degree: 3
 - Overvoltage Category: III

E8 xx 0 0 x 0 xxxx G

No. OF POLES

06 2x03 POLES

:

48 2x24 POLES

COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange (RAL2011/P)
- 4 Yellow (RAL1018/A)
- 5 Green (RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey (RAL7035/D)
- 9 White (RAL1102)
- C Green (RAL6018/U)

G RoHS compliant
(lead<4%)

In copper Alloy

0000: "@" Logo (Standard)

000A: "ANYTEK" Mark

Any special item by
customer request.
please contact sales
department.**Amphenol**
ANYTEK**CUSTOMER COPY**ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY
FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE
PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		E8 6.35 Series 2×3p-2×24p			
PART NO.	E8xx00x0xxxxG			DWG NO.	8E80001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 05/23-18	Chen Bo 09/19-17		Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
SHEET: 01/01		REV.: B			